

SERIE 13
TYPE 13935

Bottom valve

CAST IRON / EPOXY PAINT
WITH FLANGED ENDS

FEATURES

Bottom valve with flanged ends

Sizes:	DN40-300	Applications:	Industrial cold and hot water, neutral fluids, for drinking water
Pressure:	PN10	Advantages:	high tightness, compact construction, maintenance-free, environmental friendly
Material:	Cast iron / epoxy paint		




Materiaalit / Werkstoffe / Materials

1.	Runko / Gehäuse / Body	EN-GLJ-250 JL 1040
2.	Kansi / Deckel / Bonnet	
3.	Keila / Kegel / Disc	S235JR
4, 5	Tiiviste / Dichtung / Gasket	EPDM
6.	Sihti / Sieb / Screen	X5CrNi 18-10 1.4301
7.	Kara / Spindel / Stem	X20Cr13
8.	Muhvi / Hülse / Sleeve	CuSn40Pb2
9.	Pultti / Schraube / Bolt	8.8 A2A

Bottom valve, flanged

SERIE 13
TYPE 13935

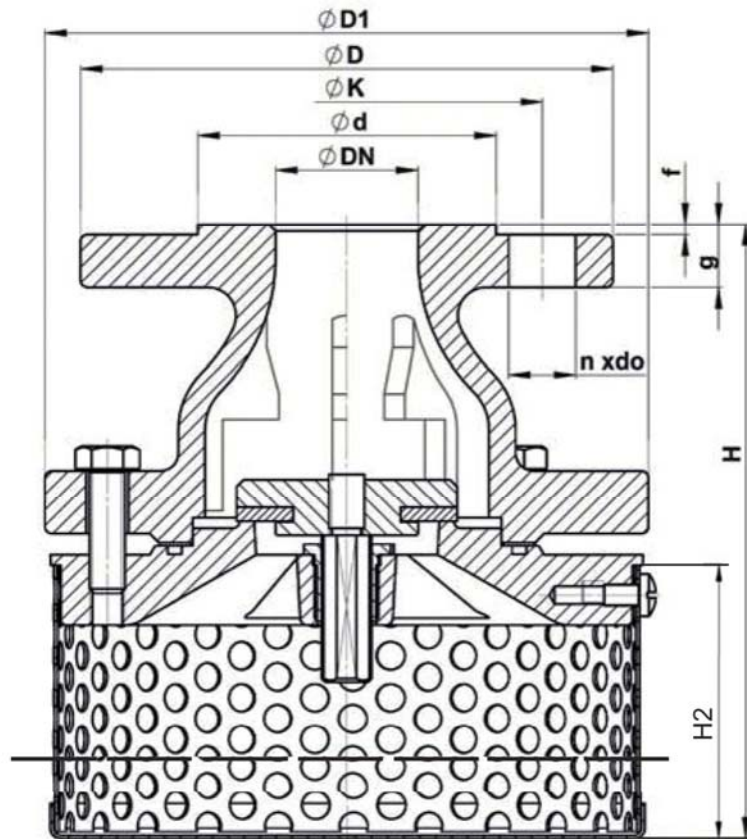

DN	D1	D	d	K	g	f	do	n	H	H2	kg
40	170	150	84	110	18	3	19	4	155	60	8,5
50	180	165	99	125	20	3	19	4	175	70	9,5
65	200	185	118	145	20	3	19	4	215	90	12,5
80	240	200	132	160	22	3	19	8	265	128	18
100	270	220	156	180	22	3	19	8	315	160	26
125	310	250	184	210	24	3	19	8	335	150	32,5
150	360	285	211	240	24	3	23	8	415	210	43
200	440	340	266	295	26	3	23	8	500	240	74
250	520	395	319	350	28	3	23	12	625	315	107
300	570	445	370	400	28	4	23	12	785	425	150

Mesh / Maschen / Mesh = \varnothing 8mm

EN 1092-2: 1997	
Paine - lämpötila	
Druck - Temperatur	
Pressure - temperature	
EN-GLJ-250, PN10	
°C	bar
-10	10
80	10

Laipat	
Flansche	EN 1092-2
Flanges	